


Model: BC

NL	Klemmenframe	Interne sideshift
FR	Cadre de pinces	Décalage latéral interne
EN	Clamps Frame	Internal side shift
DE	Klemmen Rahmen	Interne Seitenverschiebung

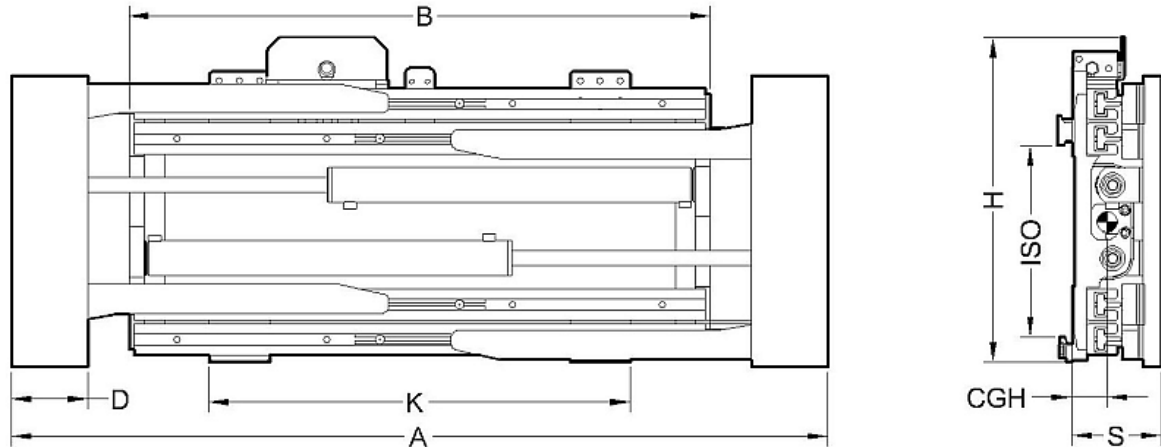

Mod nr	Cap. Q Kg/mm	B mm	A mm	H mm	D mm	K mm	CG mm	S mm	Gewicht kg	FEM / ISO
BC15E065C	1400/500	960	550-1710	652	120	840	82	173	258	2a
BC15E075C	1400/500	960	650-1910	652	120	840	82	173	232	2a
BC15E165C	1400/500	1060	550-1810	652	120	840	80	173	270	2a
BC15E175C	1400/500	1060	650-2010	652	120	840	80	173	272	2a
BC15E265C	1400/500	1160	550-1910	652	120	840	79	173	278	2a
BC15E275C	1400/500	1160	650-2110	652	120	840	79	173	280	2a
BC20E065C	2200/500	960	565-1725	652	120	840	81	173	262	2a
BC20E075C	2200/500	960	665-1925	652	120	840	81	173	264	2a
BC20E145C	2200/500	1060	505-1705	652	120	840	79	173	272	2a
BC20E155C	2200/500	1060	465-1625	652	120	840	79	173	270	2a
BC20E165C	2200/500	1060	565-1825	652	120	840	79	173	274	2a
BC20E175C	2200/500	1060	665-2025	652	120	840	79	173	276	2a
BC20E255C	2200/500	1160	465-1725	652	120	840	78	173	282	2a
BC20E265C	2200/500	1160	565-1925	652	120	840	78	173	284	2a
BC20E275C	2200/500	1160	665-2125	652	120	840	78	173	286	2a
BC20E365C	2200/500	1260	565-2025	652	120	840	78	173	294	2a
BC20E375C	2200/500	1260	665-2225	652	120	840	78	173	296	2a
BC20E465C	2200/500	1360	565-2125	652	120	840	77	173	304	2a
BC20E475C	2200/500	1360	665-2325	652	120	840	77	173	306	2a
BC20E485C	2200/500	1360	765-2525	652	120	840	77	173	308	2a
BC20E495C	2200/500	1360	865-2725	652	120	840	77	173	310	2a
BC20E565C	2200/500	1460	565-2225	652	120	840	77	173	312	2a
BC20E575C	2200/500	1460	665-2425	652	120	840	77	173	314	2a
BC30E065E	2900/500	960	565-1725	652	120	840	81	173	235	3a
BC30E155E	2900/500	1060	465-1625	652	120	840	79	173	270	3a
BC30E165E	2900/500	1060	565-1825	652	120	840	79	173	274	3a
BC30E175E	2900/500	1060	665-2025	652	120	840	79	173	276	3a
BC30E265E	2900/500	1160	565-1925	652	120	840	78	173	286	3a
BC30E275E	2900/500	1160	665-2125	652	120	840	78	173	288	3a
BC30E365E	2900/500	1260	565-2025	652	120	840	78	173	294	3a
BC30E375E	2900/500	1260	665-2225	652	120	840	78	173	296	3a
BC30E465E	2900/500	1360	565-2125	652	120	840	77	173	304	3a
BC30E475E	2900/500	1360	665-2325	652	120	840	77	173	306	3a

Model: BC

BC30E565E	2900/500	1460	565-2225	652	120	840	76	173	312	3a
BC30E575E	2900/500	1460	665-2425	652	120	840	76	173	314	3a
BC40E365E	4200/600	1250	560-1960	833	150	1050	91	193	475	3a
BC40E375E	4200/600	1250	660-2160	833	150	1050	90	193	477	3a
BC40E465E	4200/600	1350	560-2060	833	150	1050	90	193	487	3a
BC40E475E	4200/600	1350	660-2260	833	150	1050	89	193	488	3a
BC40E565E	4200/600	1450	560-2160	833	150	1050	89	193	500	3a
BC40E575E	4200/600	1450	660-2360	833	150	1050	88	193	502	3a
BC40E665E	4200/600	1550	560-2260	833	150	1050	89	193	503	3a
BC40E675E	4200/600	1550	660-2460	833	150	1050	89	193	505	3a
BC40E765E	4200/600	1650	560-2360	833	150	1050	88	193	506	3a
BC40E775E	4200/600	1650	660-2560	833	150	1050	87	193	508	3a
BC50E365G	5000/600	1250	560-1960	833	150	1050	91	193	475	4a
BC50E375G	5000/600	1250	660-2160	833	150	1050	90	193	477	4a
BC50E465G	5000/600	1350	560-2060	833	150	1050	90	193	487	4a
BC50E475G	5000/600	1350	660-2260	833	150	1050	89	193	488	4a
BC50E565G	5000/600	1450	560-2160	833	150	1050	89	193	500	4a
BC50E575G	5000/600	1450	660-2360	833	150	1050	88	193	502	4a
BC50E665G	5000/600	1550	560-2260	833	150	1050	89	193	503	4a
BC50E675G	5000/600	1550	660-2460	833	150	1050	89	193	505	4a
BC50E765G	5000/600	1650	560-2360	833	150	1050	88	193	506	4a
BC50E775G	5000/600	1650	660-2560	833	150	1050	87	193	508	4a

NL 2 Hydraulische functies
Zonder vorken
Q = Capaciteit / Ladingcenter

Opties:
- Snelmonteerklauwen
- Andere openingen op aanvraag
- Cilinderbescherming
- Externe sideshift

FR 2 fonctions hydraulique
Sans fourches
Q = capacité / centre de charge

Options:
- Griffes rapides
- Autres ouvertures sur demande
- Protection de cylindre
- Décalage latéral externe

EN 2 Hydraulic functions
Without forks
Q = Capacity / Load center

Options:
- Quick mounting claws
- Other openings on demand
- Cylinder protection
- External sideshift

DE 2 Hydraulik funktionen
Ohne Gabeln
Q = Kapazität / Lastmitte

Optionen:
- Schnellmontagekrallen
- Andere Öffnungen auf Anfrage
- Zylinderschutz
- Externe Seitenverschiebung